


# BACKFILL OF TRENCHES CROSSING ROADWAYS (EMERGENCY SITUATIONS ONLY)

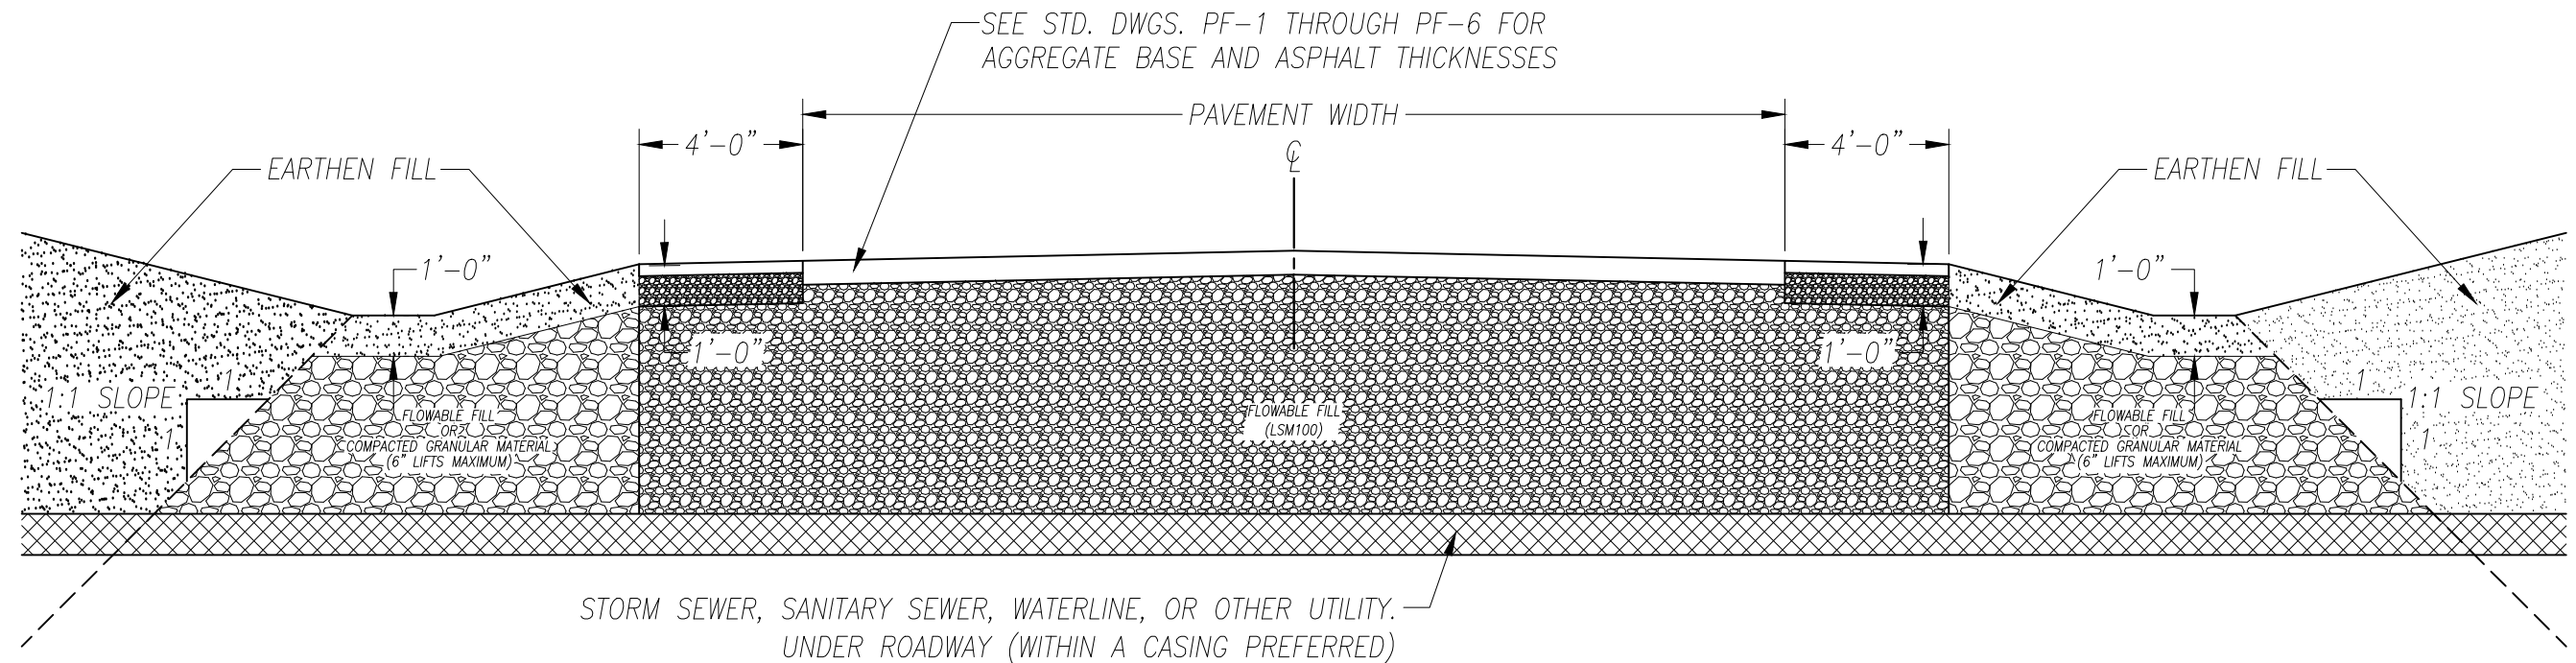

**NOTES:**

1. A COUNTY ROAD MAY ONLY BE CUT IN EMERGENCY SITUATIONS AND THE UTILITY/CONTRACTOR MUST GET PRE-APPROVAL FROM THE ALLEN COUNTY ENGINEER.
2. ANY TRENCH WITHIN THE PAVEMENT SHALL BE BACKFILLED TO THE BOTTOM OF THE ASPHALT, A MINIMUM OF SIX INCHES (6") BELOW TOP OF PAVEMENT, WITH FLOWABLE FILL (LSM100).
3. ANY TRENCH BETWEEN THE EDGE OF PAVEMENT AND 4'-0" OF THE EDGE OF PAVEMENT SHALL BE BACKFILLED TO WITHIN 1'-0" OF THE GROUND SURFACE WITH FLOWABLE FILL (LSM100).
4. ANY TRENCH BETWEEN 4'-0" OF THE EDGE OF PAVEMENT AND THE BACK OF THE FLOWLINE OF THE ROADSIDE DITCH SHALL BE BACKFILLED TO WITHIN 1'-0" OF THE GROUND SURFACE WITH FLOWABLE FILL (LSM100) OR COMPACTED GRANULAR BACKFILL, TYPE 3 IN 6" LIFTS.
5. ANY TRENCH BEYOND THE FLOWLINE OF THE BACK OF THE ROADSIDE DITCH SHALL BE BACKFILLED AT A 1:1 SLOPE WITH FLOWABLE FILL (LSM100) OR COMPACTED STRUCTURAL BACKFILL, TYPE 3 IN 6" LIFTS.
6. SEE ALLEN COUNTY STANDARD CONSTRUCTION DRAWINGS LUI-1 AND RC-1 FOR ADDITIONAL DETAILS.

REVISIONS			ALLEN COUNTY, OHIO	
NO.	DATE	BY	COUNTY ENGINEER	
1	9-21-00	BER	<b>BACKFILL TRENCHES CROSSING ROADWAYS</b>	
2	10-5-06	RJM		
3	1-16-13	RJM		
4	5-19-16	ZIG		
			STANDARD CONSTRUCTION DRAWING BFT-1	
			DRAWN BY: Z.J.G. APPROVED BY: B. E. RHODES	