
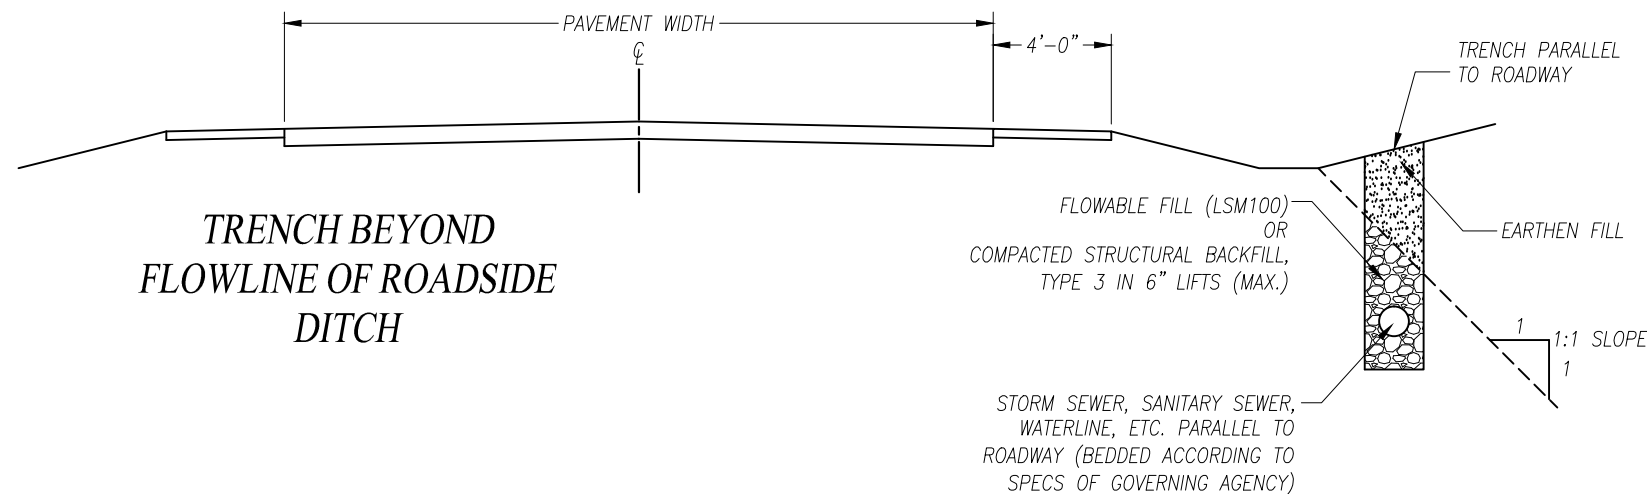
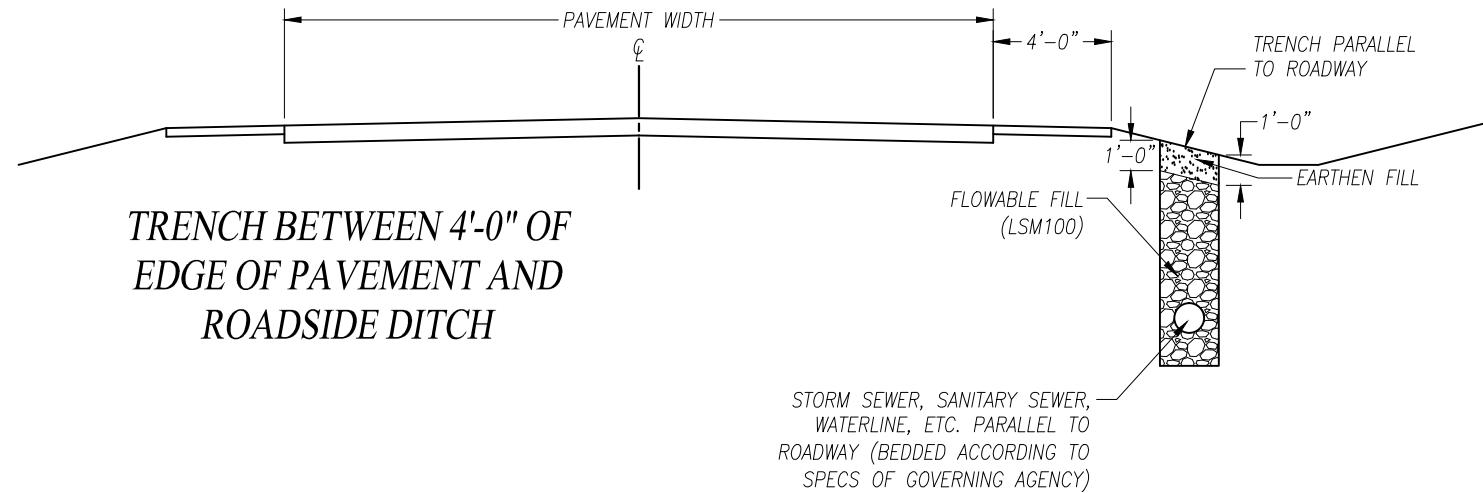


BACKFILL TRENCHES PARALLEL TO ROADWAYS

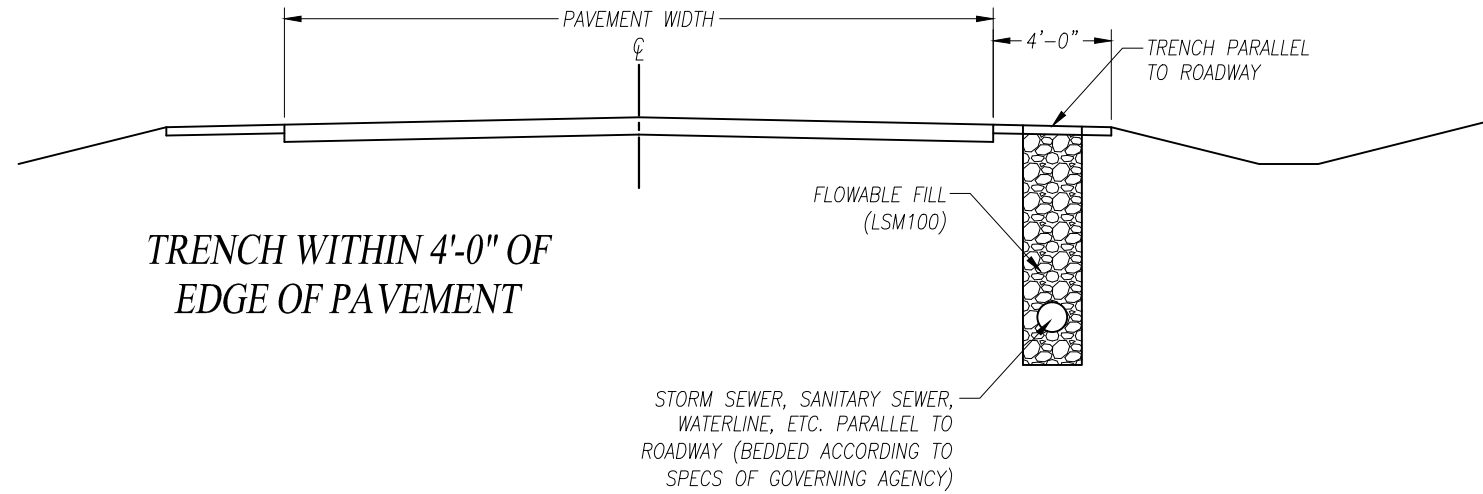

NOTES:

1. ANY TRENCH WITHIN 4'-0" OF THE EDGE OF PAVEMENT SHALL BE BACKFILLED COMPLETELY WITH FLOWABLE FILL (LSM100).
2. ANY TRENCH BETWEEN 4'-0" OF THE EDGE OF PAVEMENT AND THE BACK OF THE FLOWLINE OF THE ROADSIDE DITCH SHALL BE BACKFILLED TO WITHIN 1'-0" OF THE GROUND SURFACE WITH FLOWABLE FILL (LSM100)
3. ANY TRENCH BEYOND THE BACK OF THE FLOWLINE OF THE ROADSIDE DITCH SHALL BE BACKFILLED AT A 1:1 SLOPE WITH FLOWABLE FILL (LSM100) OR COMPACTED STRUCTURAL BACKFILL, TYPE 3 IN 6" LIFTS (MAX.).
4. SEE ALLEN COUNTY STANDARD CONSTRUCTION DRAWING LUI-1 FOR ADDITIONAL DETAILS.

REVISIONS			ALLEN COUNTY, OHIO	
NO.	DATE	BY	COUNTY ENGINEER	
1	9-21-00	BER	BACKFILL TRENCHES PARALLEL TO ROADWAYS STANDARD CONSTRUCTION DRAWING BFT-2 DRAWN BY: Z.J.G. APPROVED BY: B. E. RHODES	
2	10-5-06	RJM		
3	1-16-13	RJM		
4	5-19-16	ZJG		