


MINIMUM TURN-AROUND

NOTE: ADEQUATE DRAINAGE SHALL BE PROVIDED FOR THE STONE BASE OF THE TEMPORARY TURN-AROUND.

TURN-AROUND SHALL BE CONSTRUCTED, MAINTAINED AND REMOVED AT THE THE EXPENSE OF THE OWNER OR DEVELOPER.

25' RADIUS

25' RADIUS

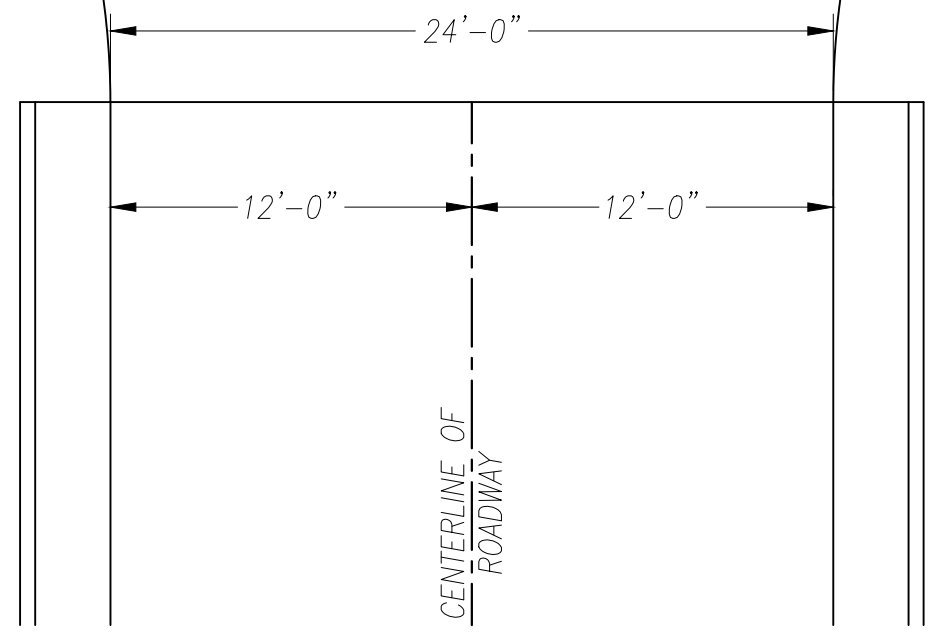

TURN-AROUND PAVEMENT BUILD-UP

- ① ITEM 441 ~ 1 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE 1, (448 OR 449), PG64-22
- ② ITEM 407 ~ TACK COAT, (APPLY AS PER TABLE 407.06-1 IN THE CMS)
- ③ ITEM 301 ~ 3 " ASPHALT CONCRETE BASE, (449) PG64-22
- ④ ITEM 304 ~ 9" AGGREGATE BASE
- ⑤ ITEM 204 ~ SUBGRADE COMPACTION

REVISIONS		
NO.	DATE	BY
1	10-5-06	RJM
2	1-16-13	RJM
3	5-16-16	ZJG
4	01-01-23	ZJG

ALLEN COUNTY, OHIO	
COUNTY ENGINEER	
PAVEMENT - TEMPORARY TURN-AROUND FOR DEAD END STREETS	
STANDARD CONSTRUCTION DRAWING P-TT	
DRAWN BY: Z.J.G. APPROVED BY: B. E. RHODES	